

HÄFELE




SLIDO FURNITURE ESSENTIALS.
STYLE IN MOTION.

SLIDO FURNITURE.

IDEAS IN MOTION.

Creativity has no technical boundaries: this is why Slido Furniture has solutions for every kind of furniture sliding door movement. In order to keep selection and processing as simple as possible, our product families provide you with the widest variety of versions for finding a fitting solution.



FOLD Folding.

Slido F-Fold61
PAGE 10




LINE Linear.

Slido F-Line12
PAGE 6
Slido F-Line15
PAGE 7



DOOR Linear.

Silent 60
PAGE 14
Silent 100
PAGE 14




PARK

Pivot/slide-in.

Slido F-Park71

PAGE 12



LINE

Linear.

Slido F-Line21

PAGE 4

Slido F-Line42

PAGE 8

SLIDO FURNITURE

HÄFELE SLIDO F-LINE21 20C

Ideal for larger overheads or on bench solutions



- > Door height (mm): 200 - 1400
- > Door width (mm): 250 - 1250 (without soft close)
350 - 1250 (one soft close)
530 - 1250 (two soft closes)
- > Door weight (kg): Min. 13 - 20 kg
- > Door thickness (mm): 16 - 19
- > Material: Housing and running gear: Zinc alloy
Guide: Plastic, Top track: Aluminium
- > Adjustment facility (mm): ± 2 on running gear using adjusting wheel

FITTING SET

Version	With or without soft close	Cat. No.
For 2 doors	With clip-in door stopper, no soft close	402.33.018
	With soft closing on one side	402.33.019
	With soft closing on both sides	402.33.020


Packing: 1 set



Supplied with:

Running gear
Door stops or soft closes
Door follower
Guides
Mounting aids
Inspection supports where applicable


Drilling pattern

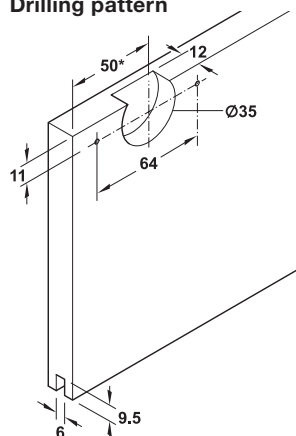

* = When using inspection support + 43 mm

HÄFELE SLIDO F-LINE21 40C

Ideal for full height pantries, wardrobes or blind corner pantries

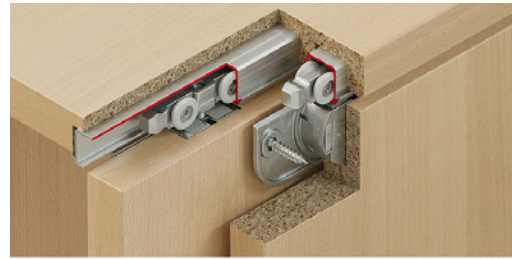

- > Door height (mm): 200 - 2200
- > Door width (mm): 250 - 1250 (without soft close)
370 - 1250 (one soft close)
550 - 1250 (two soft closes)
- > Door weight (kg): Min. 21 - 40 kg
- > Door thickness (mm): 16 - 19
- > Material: Housing and running gear: Zinc alloy
Guide: Plastic, Top Track: Aluminium
- > Adjustment facility: ± 2 on running gear using adjusting wheel

FITTING SET

Version	With or without soft close	Cat. No.
For 1 door	With clip-in door stopper, no soft close	402.33.024
	With soft closing on both sides	402.33.025
For 2 doors	With clip-in door stopper, no soft close	402.33.026
	With soft closing on one side	402.33.027
	With soft closing on both sides	402.33.028


Packing: 1 set



Supplied with:



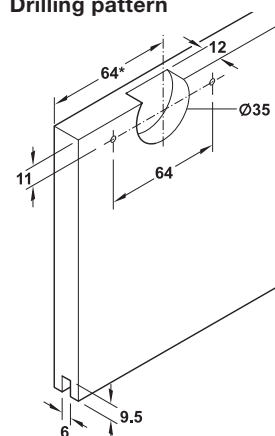

Running gear
Door stops or soft closes
Door follower
Guides
Mounting aids
Inspection supports where applicable

Drilling pattern




* = When using inspection support + 43 mm

TRACKS AND ACCESSORIES

Description	Image	Finish/colour	Length m	Cat. No.
Single top running track, for press fitting and glue fixing into groove		Bright, visible areas grooved	2.5	402.33.642
			3.5	402.33.643
Double top running track, for press fitting and glue fixing into groove		Bright, visible areas grooved	2.5	402.33.652
			3.5	402.33.653
Single top running track, for screw fixing with countersunk head screws 3.5 mm		Silver coloured anodized	2.5	402.30.642
Single bottom guide track, with harpoon rib, for press fitting and glue fixing into groove 6 mm		Grey	2.5	402.30.802

Packing: 1 piece

Installation dimensions

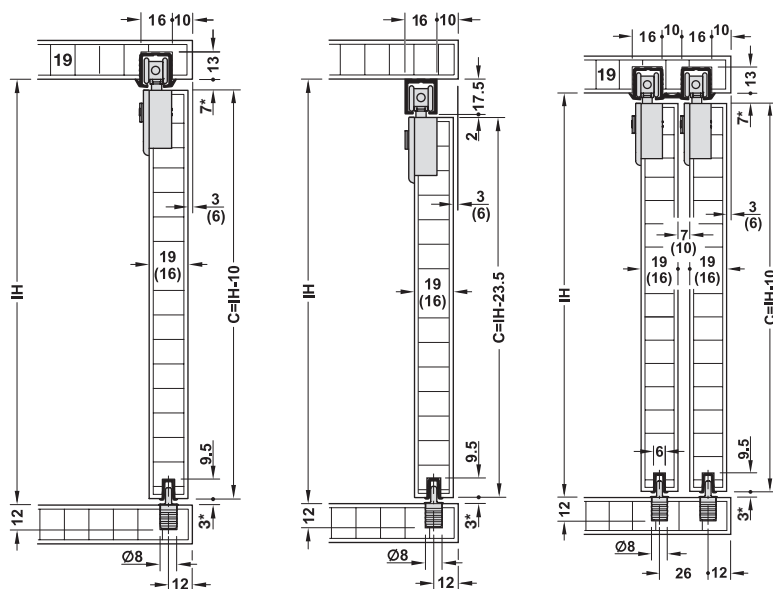



For groove mounting

IH = Inner cabinet height

C = Door height

DOOR FOLLOWER

Description	Image	Installation	Finish/colour	Cat. No.
Prevents collision of handle profiles when pushing back the doors			Zinc plated, Plastic, Steel, Rubber	407.01.988

Packing: 1 piece**Order reference:**

Order reference:
Please order running and guide tracks separately.

Please order running and guide tracks separately.
For cabinets with more than 3 doors, please order following sets: 1 set for 1 door and 1 set for 2 doors.



HÄFELE SLIDO F-LINE12

Ideal for low cost commercial / Credenza units



- > Door thickness (mm): 15 - 28
- > Door weight (kg): Min. 5 - 12
- > Height adjustment: ± 1 mm via eccentric screw when using the adjustable running gear
- > Material: Plastic, grey
- > Running gear: Bottom running
- > Running gear guided by: With double bearing mounted axle
- > Installation: Track for press fitting and glue fixing into groove, guide and running gear for press fitting and screw fixing into drill hole

INDIVIDUAL COMPONENTS

Description		For 1 door	Cat. No.
Running gear, with height adjustment ± 1 mm		2 pieces	402.21.101
Guide, spring loaded		2 pieces	404.21.201




Packing: 1 or 100 pieces

RUNNING TRACK

Description	Finish	Cat. No.
Single top/bottom running and guide track (Plastic)	White	404.14.713
	Brown	404.14.133
	Silver coloured	404.14.913


Packing: 1 piece, 3000 mm

Installation dimensions

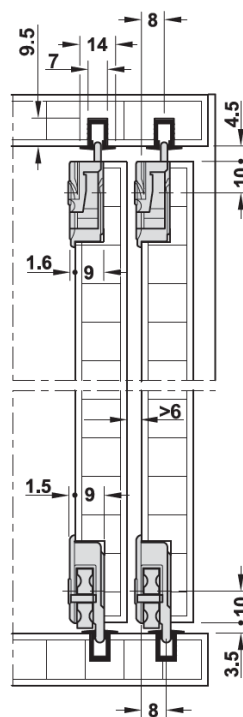


- Ⓐ Single top running track
Guide, spring loaded or lockable
- Ⓒ Single bottom guide track
Running gear with height adjustment

Door overlap





Cabinet with 2 doors



Cabinet with 3 doors

HÄFELE SLIDO F-LINE15 55A

Ideal for low cost commercial / Kitchen/ Wardrobes

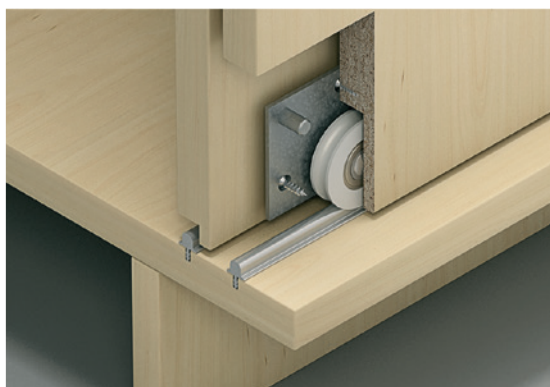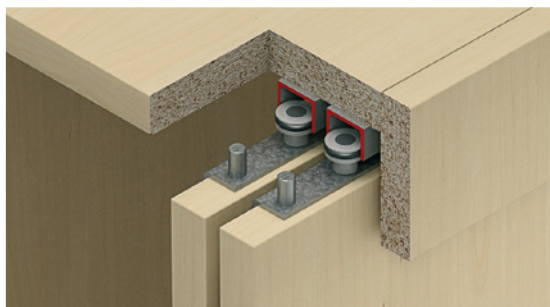

- > Door thickness (mm): 16-19
- > Weight loading (kg): Max. 55
- > Running gear: Bottom running, 1 roller
- > Running gear guided by: Ball bearing mounted roller: Plastic axle: Steel
- > Adjustment facility: Height ± 2 mm
- > Application: For 2 doors also with soft closing mechanism

FITTING SETS

Version	Detail	Cat. No.
For 2 doors	Without soft close	402.23.002
	With soft close	402.23.004
For 3 doors	Without soft close	402.23.003




Packing: 1 set



Supplied with:


Running gear
Buffers
Anti derailment device
Guides
Door stoppers and soft closers as applicable

RUNNING AND GUIDE RAILS

Detail	Version	Length m	Cat. No.
	Top track, Bright Aluminium	2.5	402.23.802
		3.5	402.23.803
	Bottom track, for groove mounting, Bright Aluminium	2.5	402.23.602
		3.5	402.23.603
	Bottom track, for screw fixing, Anodised Aluminium	2.5	402.26.622
		3.5	402.26.623


Packing: 1 piece

Installation dimensions

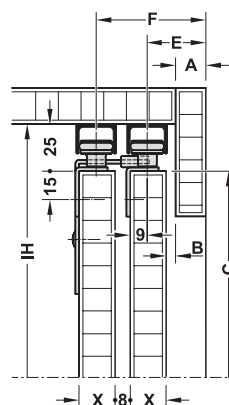


- $C = \text{Door height (IH - 25 - 3)}$
- $\text{IH} = \text{Internal cabinet height}$
- $B \geq 5$
- $D = C + X + 8$
- $E = A + B + X - 9$
- $F = E + X + 8$
- $G = A + B + X - 7.5$

Guide track, top




Running track for groove mounting and press fitting



Running track for screw fixing

Installation


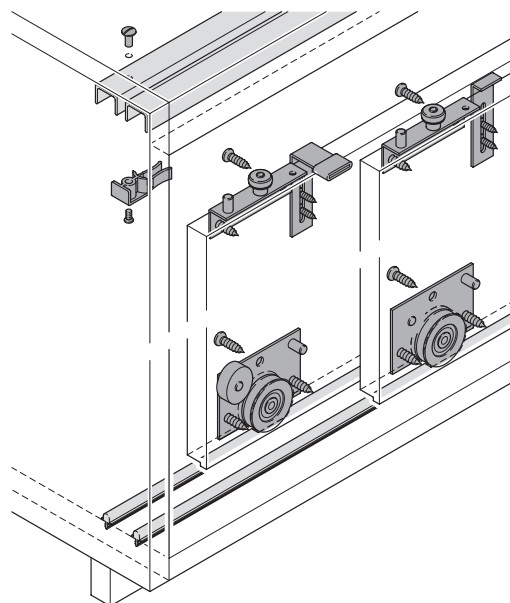


Note:

The positions of the running gears depend on the selected running tracks. Please note the drilling patterns in the installation instructions.


HÄFELE SLIDO F-LINE42 50A

Ideal for large double door wardrobes or pantries

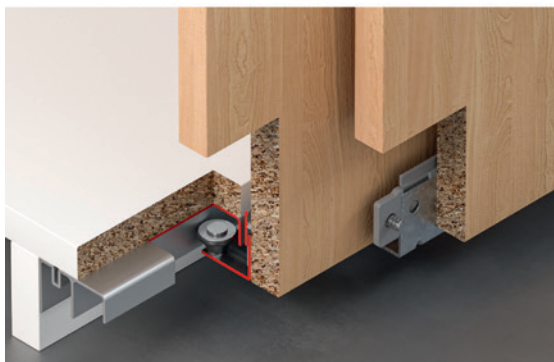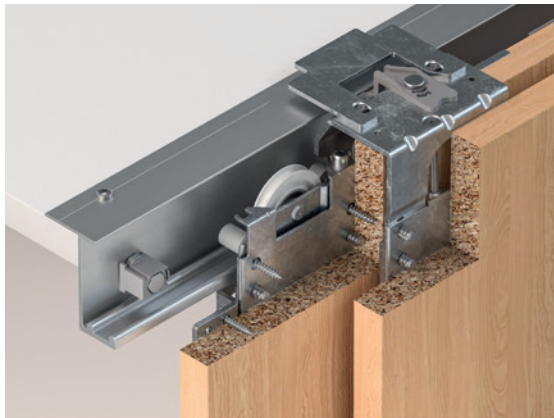


- > Door thickness (mm): 16 - 22
- > Door weight (kg): 20 - 50
- > Door height (mm): Determined by minimum weight
Example (mm): 1900 x 800 wide
- > Material: Running gears and guides: Steel, double running and guide track: Aluminium
- > Adjustment facility: Height ± 2 mm on both sides

Drilling pattern

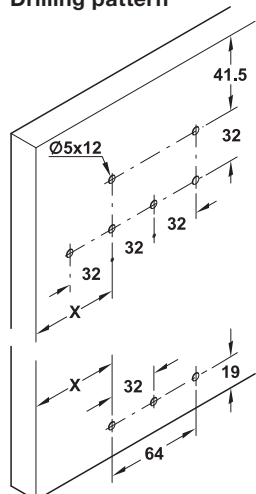

$X = G + 51 \text{ mm}$
G = Door overlap on cabinet side panel

Installation dimensions

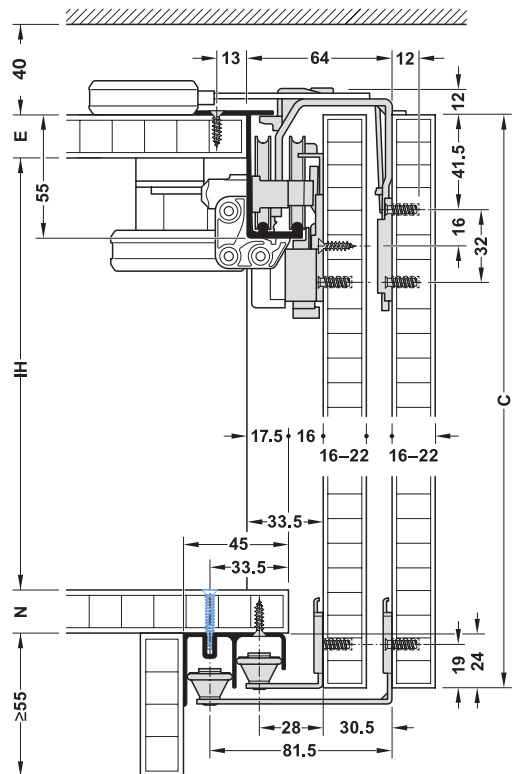

Fixing options for double bottom guide track:

- > Screw fixing from outside
- > Fixing with screws from inside the cabinet using screw channel (blue screw)

C = Door height

IH = Internal cabinet height


E = Cabinet top panel thickness (16-20 mm)

N = Cabinet base panel thickness

Calculation:

$$C = IH + E + N + 24 \text{ mm}$$

Door overlap

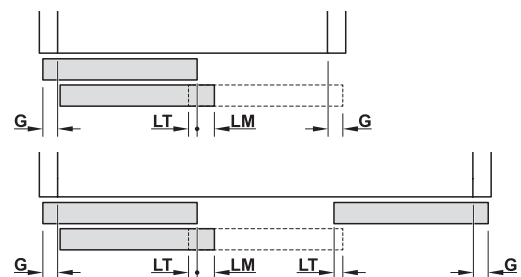


LM = Door offset (30 mm)

LT = Door overlap (20 mm recommended)

G = Door overlap on cabinet side panel


Track stopper installation

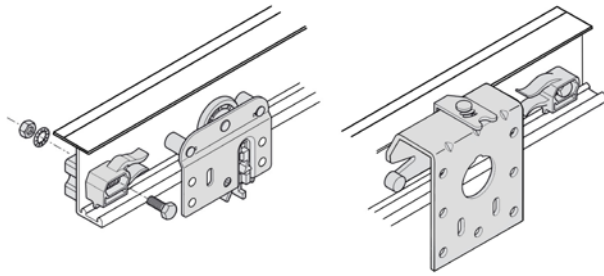

Running gear, rear door

Running gear, front door

Drilling pattern

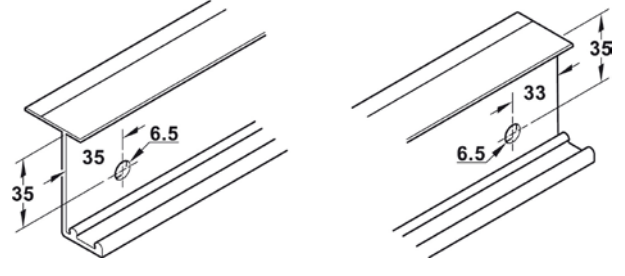

For rear door stopper

For front door stopper

SETS

Version	Version	Supplied with	Cat. No.
For 2 doors	With clip-in door stopper	4 running gears 4 guides 2 stabilising blocks 2 clip in door stoppers	400.51.532
	Additional soft-closers	2 soft-closers	400.51.543

Packing: 1 set

TRACKS

Version	Detail	Material	Finish/colour	Length m	Cat. No.
Top track		Aluminium	Silver coloured anodized	2.5	400.52.962
Bottom track		Aluminium	Silver coloured anodized	2.5	400.52.954

Packing: 1 set

HÄFELE SLIDO ID

Collision damper for multiple doors running on the same track

Description		Material	Finish/colour	Functionality	Cat. No.
For 3 doors, Door weight up to 50 kg		Activator and support: Plastic	Grey	Prevents the two rear doors from colliding	402.54.409


Packing: 1 set




Supplied with:


- 2 Activators
- 2 Supports for top and bottom

Installation

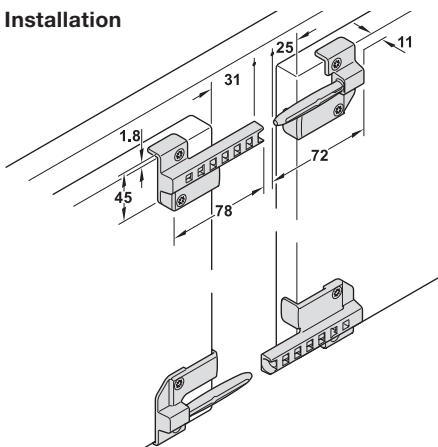

Drilling pattern

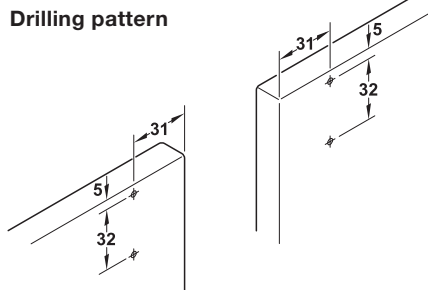

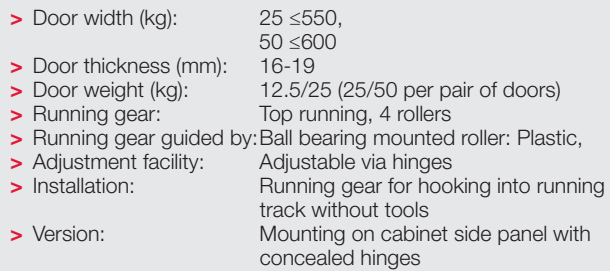

A diagram of a vertical member, possibly a column or beam, with a horizontal force of $60 + T$ applied at the top. The force is represented by an arrow pointing to the right, labeled $60 + T$. The member is shown as a vertical line with a slight tilt.


[illegible]

- Ⓐ Second drill hole not required for the 25 kg version
- Ⓑ With standard panel to panel hinge
- Ⓒ With adjustable panel to panel hinge
- Ⓓ With standard lift off hinge




Tracks, fixing materials and concealed hinges for side attachment are not included in the fitting sets.
Please order separately.


COMPONENTS




Running gear
with 1 hinge for
25 kg left door




Running gear
with 1 hinge for
25 kg right door



Running gear
with 2 hinges for
50 kg left door



Running gear
with 2 hinges for
50 kg right door



Cover cap,
non handed

Version	Mounting	Cat. No.
Running gear with 1 hinge for 25 kg pair of bifolds	Left	409.36.103
	Right	409.36.102
Running gear with 2 hinges for 50 kg pair of bifolds	Left	409.36.100
	Right	409.36.101
Cover cap	Non handed	409.36.400

Packing: 1 set



Order reference:

The running tracks, fixing material and concealed hinges for attachment at the side are not included in the set.
Please order separately.

TRACKS AND INDIVIDUAL COMPONENTS

		Material	Finish	Length m	Cat. No.
Running track for screw fixing		Aluminium	Silver coloured, anodised	1.5	409.31.601
				2.5	409.31.605

Packing: 1 piece

RUNNING RAIL AND ACCESSORIES

		Material	Finish	Cat. No.
Connecting hinge with lateral adjustment		Zinc alloy	Nickel plated	409.36.402
Rolled hinge		Steel galvanised	Galvanised	354.14.914
Lift off connecting hinge with central knuckle		Nylon	White	409.36.421
Interlocking door holder, between two doors		Plastic	Black	409.50.940

Packing: 1 piece

HÄFELE SLIDO F-PARK71 16A

Ideal for entertainment or on-bench units




- > Door height (mm): $\leq 1,500$
- > Door thickness (mm): 16 - 19 with Infront/inset
- > Push-in depth (mm): Max. 230 - 550
- > Material: Runner and cord: Steel,
Runner roller: Plastic
- > Finish/colour: Guide: Black galvanised,
Cable: Black plastic coated,
Guide roller: White


Application




Guide installation

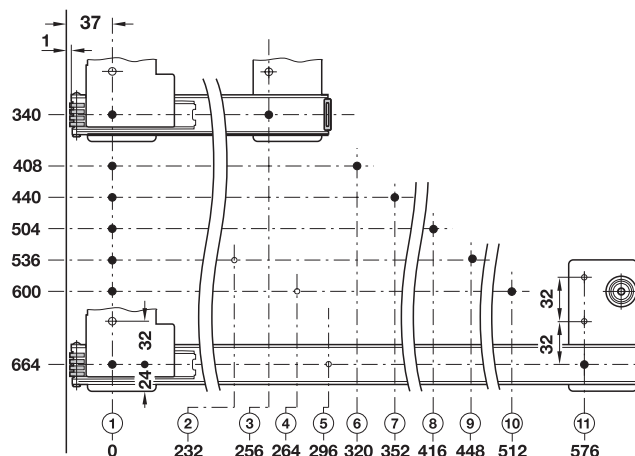

Top




Bottom

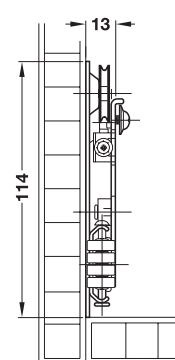

Mount guides directly on the outer side

Cable tension adjusment

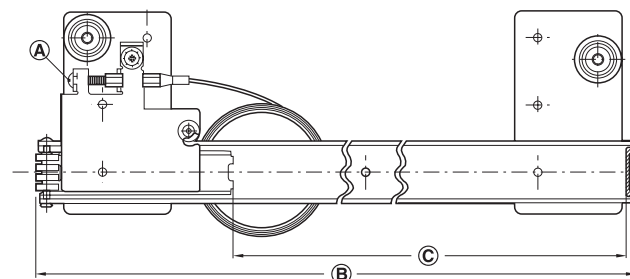

- Ⓐ Cable tension adjusting screw
- Ⓑ Guide length
- Ⓒ Retraction distance

SETS

	Supplied with	Runner length mm	Retraction distance mm	Cat. No.
For 1 door	1 pair of guides 2 cables with adjusting screw	340	Max. 230	408.25.335
		408	Max. 294	408.25.340
		440	Max. 326	408.25.345
		504	Max. 390	408.25.350
		536	Max. 422	408.25.355
		600	Max. 488	408.25.360
		664	Max. 550	408.25.365

Packing: 1 set





Order reference:
Please order door fixing set separately.

DOOR FIXING SET

For inset mounting (infront), door thickness 16-19 mm



Installation

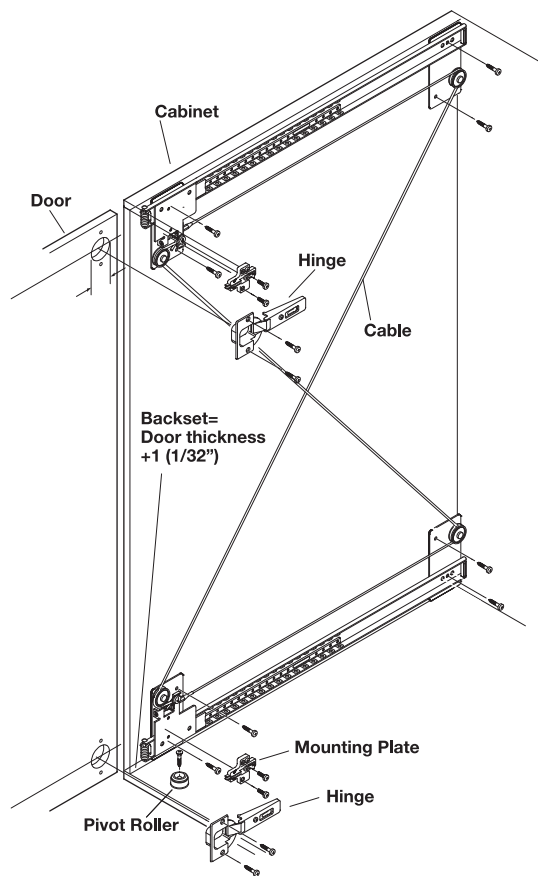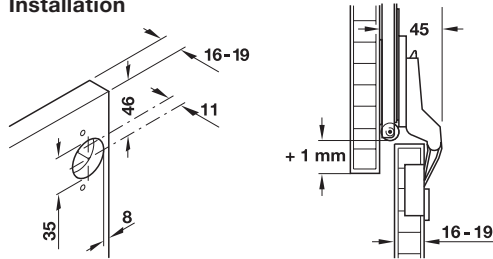

- > Area of application: Mounting door to cabinet without tools (Clip system)
- > Installation: For screw fixing

Version	Cat. No.
For 1 door	408.24.020

Packing: 1 set




Supplied with:




- 2 Concealed hinges, opening angle 95°, crank 8 mm
- 4 Fixing screws for concealed hinges, 5 x 15 mm
- 2 Cruciform mounting plates
- 4 Fixing screws for cruciform mounting plates, M4 x 5 mm
- 2 Door stoppers
- 2 Fixing screws for door stoppers, 3.5 x 25 mm
- 10 Fixing screws for guide, 4.0 x 12 mm

HANDLE PROFILE AND STRENGTHENING STRIP

For wooden doors

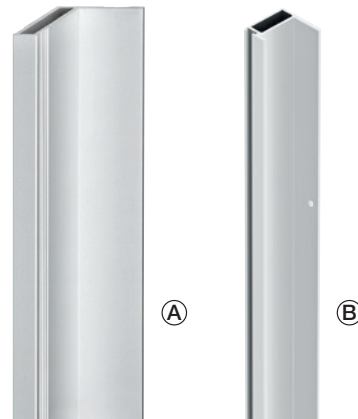

Dimensions

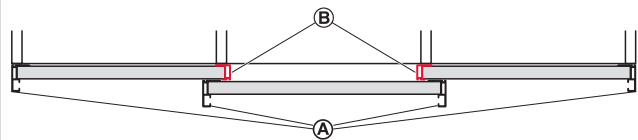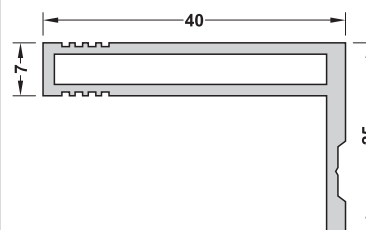

- > Area of application: For wooden sliding doors
- > Material: Aluminium
- > Installation: For screw fixing

Finish	Cat. No.
① Handle profile	
Silver coloured, anodised	126.12.900
Stainless steel coloured, anodised	155.01.670
Matt black, RAL 9017	155.01.671


Packing: 1 piece (2500 mm)

Finish	Cat. No.
② Strengthening strip	
Silver coloured, anodised	400.51.442

Packing: 1 piece (12500 mm)


HÄFELE SILENT 60/A-100/A

Ideal for cavity sliders

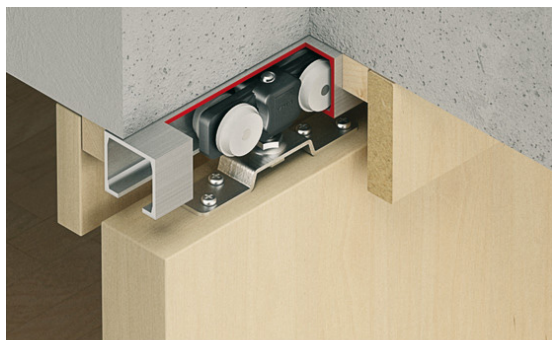

- > Door thickness (mm): 30-40
- > Door weight (kg): 60/100
- > Running gear: Top running
- > Adjustment facility: Door height adjustable ± 5 mm
- > Application: For 1-leaf and 2-leaf sliding doors
- > Installation: Suspension with screwed on support flange, wall mounting and ceiling installation



SET COMPONENTS

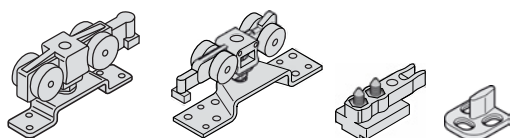

Model	Door weight kg	Cat. No.
Silent 60/A	≤ 60	940.60.011
Silent 100/A	≤ 100	941.02.011
Track buffer with retaining spring		940.42.041
Floor guide, plastic grey for timber		940.42.031


Packing: 1 piece

RUNNING TRACK


Detail	Version	Length m	Cat. No.
	Top track, Bright Aluminium	2	940.42.200
	Top track, Silver anodised	3	940.42.300
	Top track, Silver anodised	6	940.43.962

Packing: 1 piece

Wall mounting

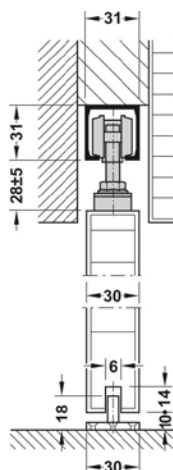


Ceiling installation

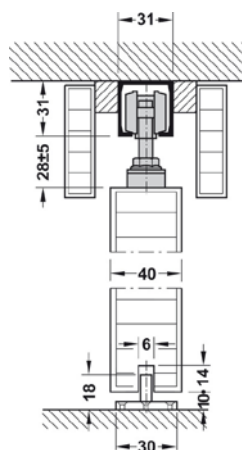

HÄFELE PLANOFIT

For wooden doors

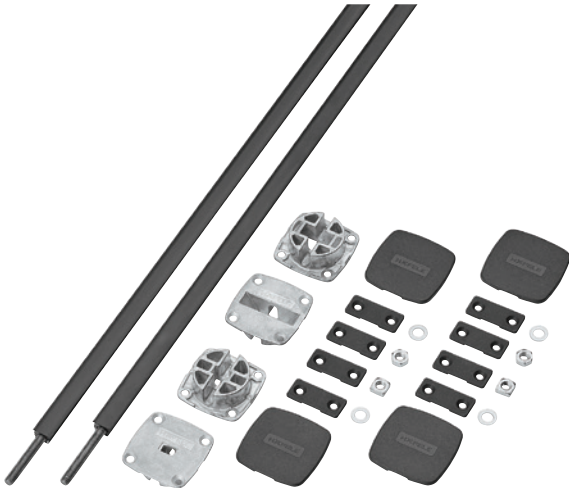

- > Area of application: For hinged doors and sliding doors, prevents doors warping in either direction or straightens doors once warped
- > Door thickness (mm): Min. 16
- > Installation: For recess mounting and screw fixing
- > Adjustment facility: Via hexagonal nut
- > Finish: Threaded bar: Bright, Tensioner: Bright

Door height mm	Dim. A mm	Black
Max. 2400	≤ 1900	407.90.202
Max. 2650	≤ 2175	407.90.203


Packing: 1 set



Supplied with:


1 Set consists of 2 straightening fittings including all individual components.

Installation

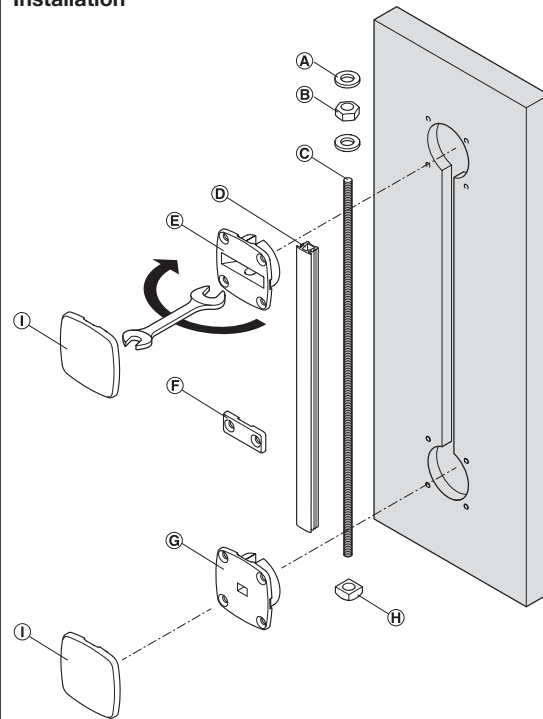

- (A) Lock washer
- (B) Hexagonal nut
- (C) Threaded bar
- (D) Trim strip
- (E) Top tensioner
- (F) Retaining plate
- (G) Bottom tensioner
- (H) Square nut
- (I) Cover cap

Drilling pattern

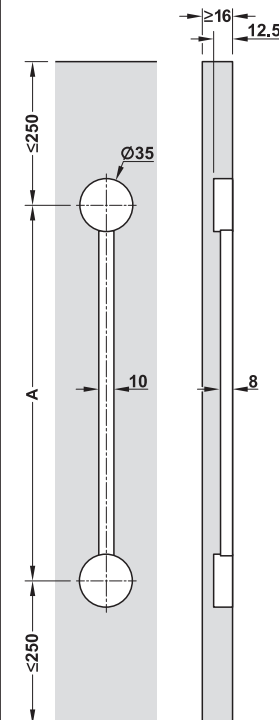

Note:

2 Straightening fittings recommended per door leaf.
Not suitable for hardwood.

Please note when using this product in combination with lacquered panels, a pattern of the routed recesses may emerge on the front.



732.04.426 SLIDO ESSENTIALS / 09.2022

Häfele New Zealand Ltd.

Auckland 16 Accent Drive, East Tamaki, Auckland

Wellington The Wool Store, Level 1 262 Thorndon Quay, Wellington

Christchurch 12 Sir James Wattie Drive, Hornby South, Sockburn, Christchurch

Phone: 0800 442 335 | **Email:** sales@hafele.co.nz | www.hafele.co.nz